

CHEAP Serie

PROTECT YOUR ENVIRONMENT FROM DRAUGHTS
The Comaglio Automatic draught stoppers are removable and patented.

422 I 472 I 420MINI I 470MINI I 512 I 540 I 470ACU I 475

The CHEAP series offers a new third generation tilting mechanism. It works by branching off the double adjusting mechanism of the Pressure Series, since it moves the active function of the floor closing springs (which are limited now to a passive return function) to 2 stiff levers that guarantee complete control of the moving profile.

The presence of this icon means that the product is suitable for fire stop doors.




The presence of this icon means that the product is suitable for doors with sound insulation.



422



DOORS IN: STEEL WOOD PVC



Components:

- Comaglio new balancing mechanism
- Fixed "U" shaped profile large 12 mm.
- Moving profile extractable
- Round nylon push button
- 2 steel return springs
- EPDM seal

Options:

- Fixed "U" shaped profile large 12.5 mm. (art.420)
- Brass hexagonal push button
- Rectangular nylon push button
- Black brush 48x1100
- Self-extinguishing ISOLA silicon seal
- Special end for PVC door frames

Standard lengths cm:


33 Can be cut shorter by: cm.7

43 Can be cut shorter by: cm.13

63 83 103 123 133 Can be cut shorter by: cm.20

472

DOORS IN: STEEL WOOD PVC

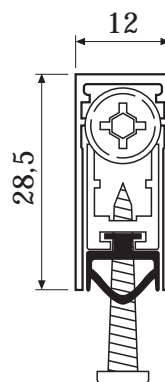

Components:

- Comaglio new balancing mechanism
- Fixed "U" shaped profile large 12 mm.
- Moving profile extractable
- Round nylon push button
- 2 steel return springs
- 2 self-drilling pre-fitted screws
- EPDM seal

Options:

- Fixed "U" shaped profile large 12.5 mm. (art.470)
- Brass hexagonal push button
- Rectangular nylon push button
- 2 self-tapping pre-fitted screws
- Black brush 48x1100
- Special end for PVC door frames

Standard lengths cm:


33 Can be cut shorter by: cm.7

43 Can be cut shorter by: cm.13

63 83 103 123 133 Can be cut shorter by: cm.20

420MINI

DOORS IN: STEEL WOOD ALUMINIUM



Components:

- Comaglio new balancing mechanism
- Fixed "U" shaped profile large 12 mm.
- Moving profile extractable
- Round nylon push button
- 2 steel return springs
- EPDM seal with 4 pressure points

Options:

- Brass hexagonal push button
- Rectangular nylon push button
- Black brush 48x600

Standard lengths cm:


33 Can be cut shorter by: cm.7

43 Can be cut shorter by: cm.13

63 83 103 123 133 Can be cut shorter by: cm.20

470MINI

DOORS IN: STEEL WOOD ALUMINIUM



Components:

- Comaglio new balancing mechanism
- Fixed "U" shaped profile large 12 mm.
- Moving profile extractable
- Round nylon push button
- 2 steel return springs
- 2 self-drilling pre-fitted screws
- EPDM seal with 4 pressure points

Options:

- Brass hexagonal push button
- Rectangular nylon push button
- 2 self-tapping pre-fitted screws
- Black brush 48x600

Standard lengths cm:


33 Can be cut shorter by: cm.7

43 Can be cut shorter by: cm.13

63 83 103 123 133 Can be cut shorter by: cm.20

512

DOORS IN: STEEL WOOD




- Components:
- Comaglio new balancing mechanism
 - Fixed "Omega" shaped profile large 12 mm.
 - Moving profile extractable
 - Round nylon push button
 - 2 steel return springs
 - EPDM seal
- Options:
- Brass hexagonal push button
 - Rectangular nylon push button
 - Black brush 48x1100
 - Self-extinguishing ISOLA silicon seal

Standard lengths cm:	
33	Can be cut shorter by: cm.7
43	Can be cut shorter by: cm.13
63 83 103 123 133	Can be cut shorter by: cm.20

540

DOORS IN: STEEL




- Components:
- Comaglio new balancing mechanism
 - Fixed "T" shaped profile
 - Moving profile extractable
 - Round nylon push button
 - 2 steel return springs
 - EPDM seal
- Options:
- Brass hexagonal push button
 - Rectangular nylon push button
 - Black brush 48x1100
 - Self-extinguishing ISOLA silicon seal

Standard lengths cm:	
33	Can be cut shorter by: cm.7
43	Can be cut shorter by: cm.13
63 83 103 123 133	Can be cut shorter by: cm.20

470ACU

DOORS IN: STEEL WOOD




- Components:
- Comaglio new balancing mechanism
 - Fixed "U" shaped profile large 12.5 mm.
 - Moving profile extractable
 - Round nylon push button
 - 2 steel return springs
 - 2 self-drilling pre-fitted screws
 - Self-extinguishing silicon seal
- Options:
- Brass hexagonal push button
 - Rectangular nylon push button
 - 2 self-tapping pre-fitted screws

Standard lengths cm:	
33	Can be cut shorter by: cm.7
43	Can be cut shorter by: cm.13
63 83 103 123 133	Can be cut shorter by: cm.20

475

DOORS IN: STEEL



- Components:
- Comaglio new balancing mechanism
 - Fixed "U" shaped profile large 12.5 mm. with lateral fixation
 - Moving profile extractable
 - Round nylon push button
 - 2 steel return springs
 - EPDM seal
- Options:
- Brass hexagonal push button
 - Rectangular nylon push button
 - Black brush 48x1100
 - Self-extinguishing ISOLA silicon seal

Standard lengths cm:	
33	Can be cut shorter by: cm.7
43	Can be cut shorter by: cm.13
63 83 103 123 133	Can be cut shorter by: cm.20



Ask technical informations about sound insulation of our draught stoppers: we can give you useful suggestions for increase acoustic performances of your door.

CHEAPSerie

Instructions page 12

Examples of application page 14

Accessories page 15

Packaging page 15

