



**Locks for  
fire resistant  
doors**



**DOUBLE  
SAFETY:  
NO PANIC,  
NO BACTERIA**



In line with its attention to safety, ISEO has decided to add this measure to a device which is always present in public environments and in all those places where hygiene and healthcare is a basic requirement: hospitals, clinics, treatment homes, but also child care centres and nursery schools.

Therefore, the panic function is enriched with the antibacterial protection, AntiGerm\*, whose performance is certified by Padova University Molecular Medicine Department.

The antibacterial treatment action is permanent and does not require special maintenance. The constant release of silver ions ensures top efficiency throughout the product life, even in case of surface scratches.

**\*Antibacterial protection for panic exit devices and accessories (except for Stainless steel/PVD finishes).**


**All ISEO panic and emergency exit devices with antibacterial coating AntiGerm have obtained the voluntary certification ICIM 021AW/O**



## Certifications



EN12209

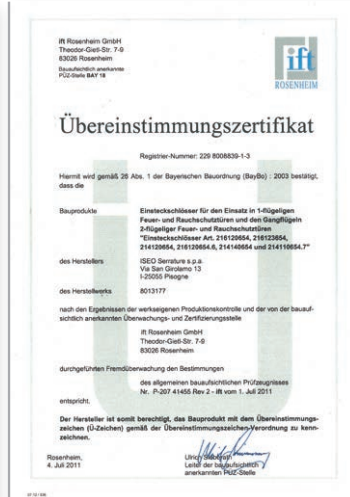

DIN 1825

Certifications for fire resistant locks 214\* e 216\* series



EN 179




Certifications for fire resistant locks 214\* and 212\* series with emergency function, EN 179 standard



Code  
Status  
Single package  
Multiple package  
Min. ord.



**Push-Palmo for main and secondary leaf**

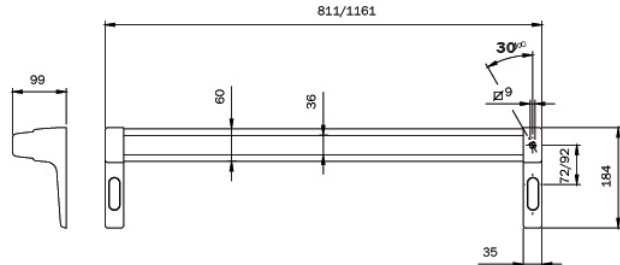

**Push Palmo** panic exit device for FIRE RESISTANT doors, **FOR MAIN AND SECONDARY LEAF, REVERSIBLE**, to be used with a panic exit mortice lock and counterlocks with 9 mm handle follower. **CENTER DISTANCE 72 MM** with handle follower rotation **30°**. Mechanism in red/black painted finish. Templates. Assembly instructions. SQUARE SPINDLE NOT INCLUDED. CE EN1125 mark and ICIM product certification.

**To be ordered separately:**

- Lock 2141\*\*65\* - Counterlock 2126\*\*65\* - Counterlock 2127\*\*65\*
- Kit of thermoexpanding gaskets 94000020 - Striking plate 032094
- Accessories 0321\*4
- Microswitch 94400030.
- Square spindle 947930

Length mm 811	<b>94490815839</b>	B	1	-	1	YES
Length mm 1161	<b>94491165839</b>	C	1	-	1	YES

**Certifications**



Certifications of the devices according to EN1125 standard

The ICIM certification as per EN 1125 is only valid if the operating bar in this page is used in conjunction with ISEO locks, striking plates, counterlocks and accessories as indicated in the next page. Whoever uses a certified panic exit device in conjunction with locks, counterlocks, accessories and/or striking


plates different from the ones specified by ISEO shall be responsible for compliance with EN 1125.

All the updated certificates can be downloaded from our web site: [www.iseoserrature.it](http://www.iseoserrature.it)




## Push-Palmo for main and secondary leaf

The panic exit device for fire resistant doors with MORTICE LOCK FOR MAIN LEAF is made up of a horizontal bar which operates the locking mechanism through the handle follower. The operation of the bar causes the rotation of the handle follower, unlocks the lock and opens the door. Supplied in sizes mm 811 and 1161, shortenable to mm 330, reversible mechanism in red/black finish for usage on right- or left-handed doors. All versions can be used with a microswitch that signals door openings.

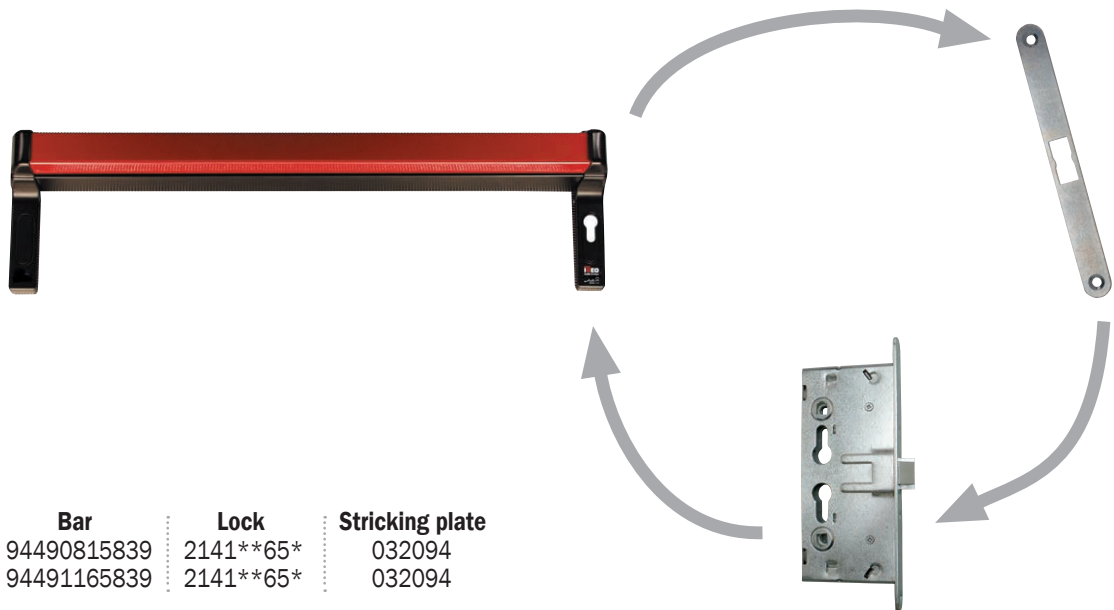


The panic exit device for fire resistant doors with MORTICE COUNTERLOCK FOR SECONDARY LEAF is made up of a horizontal bar which operates the locking mechanism through the handle follower. The operation of the bar causes the rotation of the handle follower of the counterlock, by which the upper and lower rod will move inside, the latchbolt of the panic exit lock in the main leaf will be released and both leaves can be opened. Supplied in sizes mm 811 and 1161, shortenable to mm 330, reversible mechanism in red/black finish for usage on right- or left-handed doors. All versions can be used with a microswitch that signals door openings.

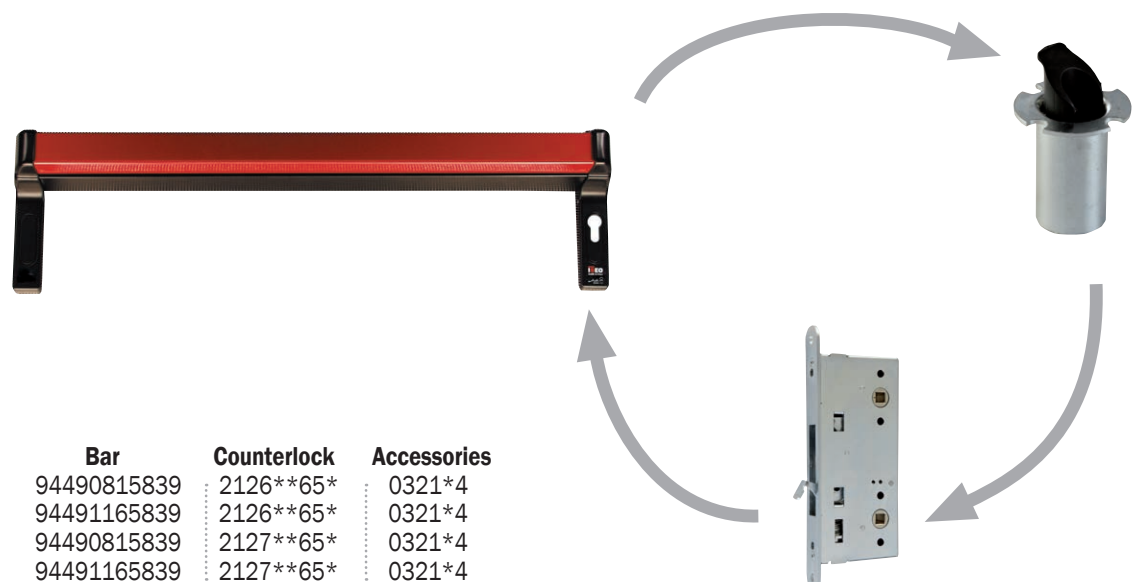

Code  
Status  
Single package  
Multiple package  
Min. ord.

## Accessories



Microswitch detecting door openings, to be fitted in the **Push Palmo SERIES 9449** mechanism.  
Can be used in conjunction with security systems. Instructions sheet.

**94400030** D 1 - 1 NO



Cover with cylinder hole for European profile cylinder for **Push Palmo bars SERIES 9449**  
for panic exit mortice locks with **center distance 72/92 mm**.  
In BLACK painted zinc diecast.

**040840** D 10 - 10 NO

